



Zaporno regulacioni ventil
Regulating globe valve

Type RV 1

PN 6

KUĆIŠTE
BODY

UNUTARNJI DIJELOVI
INNER PARTS

NNAZIVNI OTVOR
NOMINAL DIAMETER

NAZIVNI TLAK (bar)
NOMINAL PRESSURE

TEMPERATURA
TEMPERATURE RANGE

SPAJANJE
CONNECTION

STANDARDNA IZVEDBA
STANDARD DESIGN

GG-25/ W.Nr. 0.6025
CAST IRON EN-JL 1040


NEHRĐAJUĆI ČELIK
STAINLESS STEEL

DN 15-200

PN 6


DO 300°C
TO 300°C

PRIRUBNICA DIN 2501
FLANGES

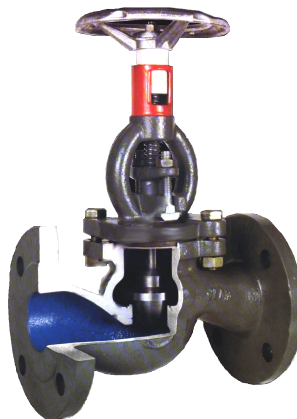

NAMJENA: VODA, PARA, ZRAK,
INERTNI PLINOVI.

CONTENTS: WATER, STEAM, AIR,
INERT GASES.

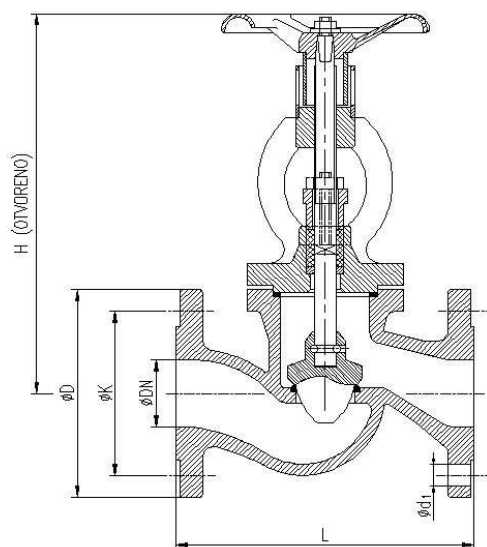

DN	L	H	øD	øK	ød ₁	n	masa weight kg
15	130	214	80	55	11	4	4,2
20	150	214	90	65	11	4	4,4
25	160	233	100	75	11	4	6,5
32	180	233	120	90	14	4	9
40	200	286	130	100	14	4	10,5
50	230	286	140	110	14	4	13
65	290	335	160	130	14	4	18
80	310	379	190	150	18	4	23
100	350	457	210	170	18	4	28
125	400	513	240	200	18	8	51
150	480	598	265	225	18	8	70
200	600	753	320	280	18	8	140